


# System Datasheet

## ISSE

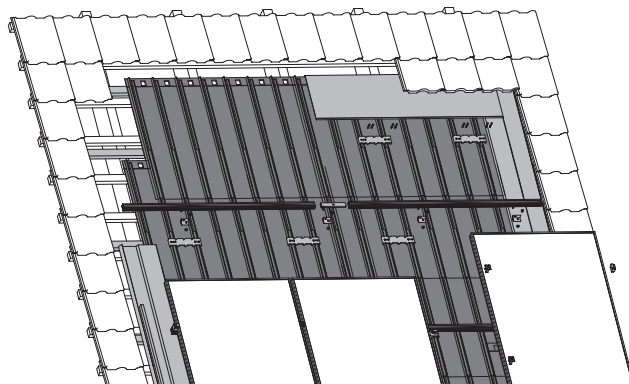

### General

System	Semi-integrated PV-mounting system
Content	HDPE roof covering, anchors, rails, flashing, module clamps, sealing collars, fastening material
System warranty	10 years
Application area	Pitched roof (except hydrogen sulfide exposition)
Roof covering	Tiles
Roof slope	min. 15°/max. 70°
Module tilt	Roof parallel

### System properties

Material	Stainless steel, aluminum and HDPE
Roof coverage	Partial and full coverage possible

### Modules

Type	PV-modules with frame height between 30-50 mm
Module size (max)	Length: unlimited; Width: unlimited
Module guidance	Vertical/Portrait

### Certifications

TÜV	ID1111212485 according to 2PfG
Water thightness	MFPA 5.1/10-535
Fire safety	MCS EXT.S.AA, B roof t1, B roof t3, ENV1187, EN13501-5
MCS012	IK0197/02 Issue: 04

### Services

PV layout	Provided by Renusol
-----------	---------------------

ISSE 06 2020

EN | Renusol System Datasheet

Misprints and errors, technical or other changes and changes in the availability of products are expressly reserved